




# DATA SHEET

## PM-1200 Series

### LED outline & side markers



#### Images & Dimensions

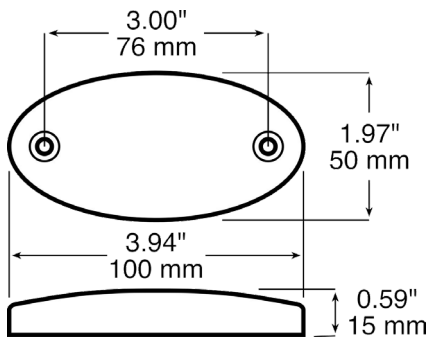

#### PM-1200 mounting accessories



PM-B1200-09V PM-B1200-09H PM-B1200-09X

Lights sold separately

#### Part numbers

PM-1200A	Side marker, amber
PM-1200C	Front outline marker, white
PM-1200R	Rear outline marker, red
PM-B1200-09V	Vertical bracket
PM-B1200-09H	Horizontal bracket
PM-B1200-09X	Chrome bezel (installs behind 1200 series light when mounting to flat surfaces)



#### Specifications - PM-1200A side marker light

<b>Functions:</b>	Side marker light with integral reflex reflector
<b>LEDs:</b>	3 diodes
<b>Certifications:</b>	ECE Reg 3 IA E9 02.1008 ECE Reg 91 SM1 E9 00.1008
<b>Voltage:</b>	Multi-voltage 9-32Vdc
<b>IP rating:</b>	IP67
<b>Operating temperature:</b>	-30°C to + 50°C
<b>Mounting:</b>	Surface mounts on any flat surface May be mounted horizontally or vertically Supplied with closed-cell foam mounting gasket Optional mounting accessories available
<b>Cables:</b>	300mm long sheathed cable
<b>Power rating:</b>	0.6W @ 12V / 1.3W @ 24V
<b>Current draw:</b>	0.06A @ 12V / 0.06A @ 24V
<b>Reverse polarity protection:</b>	Yes
<b>Warranty:</b>	3 years



#### Specifications - PM-1200C & PM-1200R outline marker

<b>Functions:</b>	Front & rear outline marker lights with integral reflex reflector
<b>LEDs:</b>	3 diodes
<b>Certifications:</b>	PM-1200C ECE Reg 3 IA E9 02.1189 ECE Reg 7 R1 E9 02.1189 PM-1200R ECE Reg 3 IA E9 02.1108 ECE Reg 7 A E9 02.1108
<b>Voltage:</b>	Multi-voltage 9-32Vdc
<b>IP rating:</b>	IP67
<b>Operating temperature:</b>	-30°C to + 50°C
<b>Mounting:</b>	Surface mounts on any flat surface May be mounted horizontally or vertically Supplied with closed-cell foam mounting gasket Optional mounting accessories available
<b>Cables:</b>	300mm long sheathed cable
<b>Power rating:</b>	PM-1200C 0.3W @ 12V / 0.6W @ 24V PM-1200R 0.5W @ 12V / 1.1W @ 24V
<b>Current draw:</b>	PM-1200C 0.02A @ 12V / 0.02A @ 24V PM-1200R 0.05A @ 12V / 0.05A @ 24V
<b>Reverse polarity protection:</b>	Yes
<b>Warranty:</b>	3 years



#### Materials

<b>Base:</b>	PMMA-HI
<b>Lens:</b>	PMMA-HI