

DATA SHEET

PM-1216/1217/1218C-9

Reverse light



Images

LumenX




Specifications

Functions:	LED reverse light
LEDs:	9 x LEDs
Lens type:	LumenX®
Lens colour:	Clear
Certifications:	ECE Reg 23
Voltage:	Dual voltage 12/24Vdc
IP rating:	IP67
Operating temperature:	-30°C to +50°C
Mounting:	PM-1216C & 1216CC surface mount with bracket PM-1217C-9 surface mounts using a PM-817 series bracket or flush mounts using PM-B426-18 grommet PM- 1218C-9 flange mounts
Wiring:	Built-in AMP-compatible receptacle for direct attachment to body harness, or requires PM-417-48 or PM-817-48 plug AMP Terminals: T1 = ground T2 = not used T3 = indicator
Power rating:	6.0W @ 12V / 6.0W @ 24V
Average current draw:	0.29A @ 12V / 0.15A @24V
Reverse polarity protection:	Yes
Warranty:	3 years



Dimensions

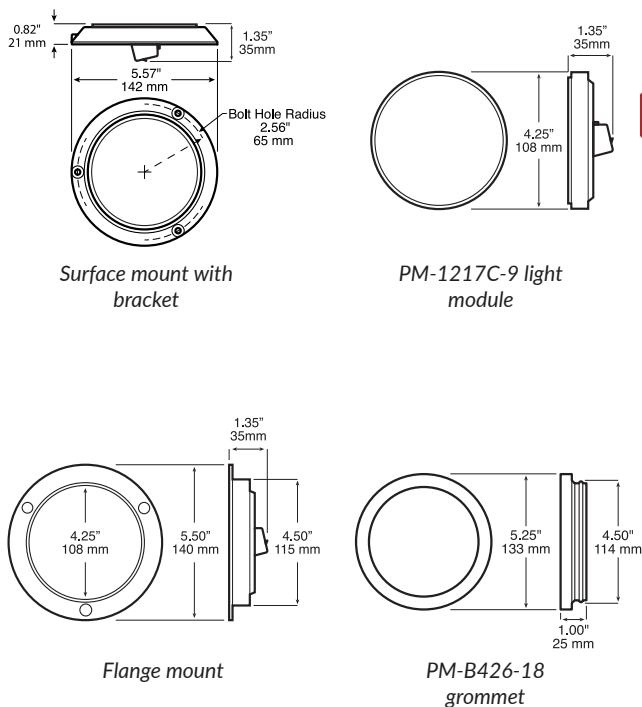

Materials

Lens:	PMMA-HI
Base:	ABS

Part numbers

PM-1216C-9	LED reverse light - surface mount, black bracket
PM-1216CC-9	LED reverse light - surface mount, chrome bracket
PM-1217C-9	LED reverse light module- (see mounting accessories below)
PM-1218C-9	LED reverse light - flange mount
PM-B817-09	Black bracket for PM-1217C-9 (surface mounting)
PM-B817-10	Chrome bracket for PM-1217C-9 (surface mounting)
PM-B426-18	Grommet for PM-1217C-9 (flush mounting)
PM-B417-48	2 wire plug
PM-B817-48	2 wire plug (moulded)

+44 (0) 1296 340045

sales@petersoneurope.co.uk
sales@petersoneurope.eu

petersoneurope.com
petersoneurope.eu

