



# DATA SHEET

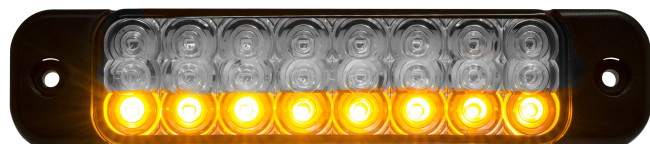

PM-2291A-R

Combination LED rear position stop & direction indicator

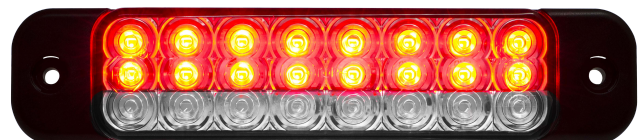

Appears clear when unlit



## Specifications

24 LEDs

8 diode single-row indicator function

16 diode double-row rear position & stop functions

ECE certified to ECE Regs 6 and 7 for both horizontal and vertical mounting:

E9 6R 0129 22527

E9 7R 0227 22527

Certified to ECE Reg 10: E6 10R05 011029

Operating temperature range: -30°C to +50°C

IP67 rated

Electronics:

Dual voltage 12/24V

Operating range: 9-32Vdc


Reverse polarity protected

Hard wired terminals potted in polyurethane

0.5 metre long cable :	Yellow	Indicator
	Red	Stop
	Brown	Rear position
	White	Ground

Current draw:

Indicator	13.5v	0.20A	28v	0.11A
Stop	13.5v	0.30A	28v	0.16A
Rear position	13.5v	0.03A	28v	0.02A

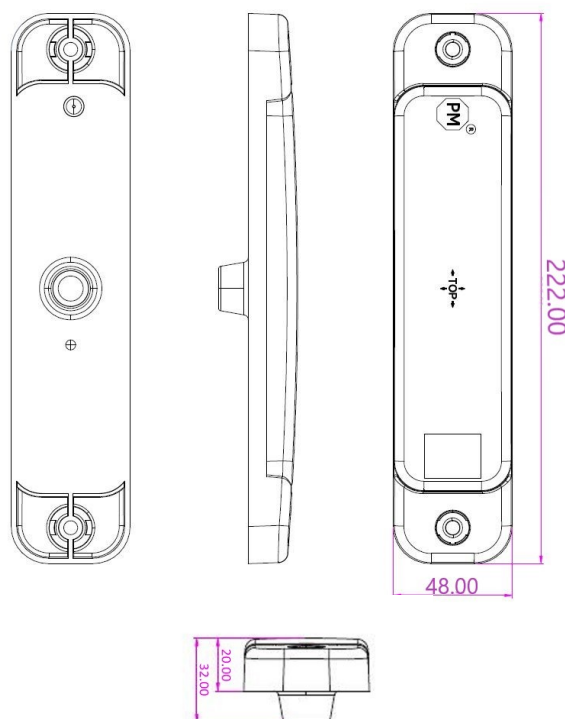

## Materials

Lens: PMMA-HI

Housing: ABS