

DATA SHEET

PM-358 series

LED strip light, low-profile



Images

SEALED

Suitable for interior or exterior use



PM-358-3




PM-358-2



PM-358-1



Optimised profile & flat mounting tabs on both ends easily screw-mount to flat surfaces




Optional PM-5600 series timer switch available separately.

Specifications

- Functions:** LED strip light, low-profile
- LEDs:**
 - PM-358-1: 4 x Great White® LEDs
 - PM-358-2: 6 x Great White® LEDs
 - PM-358-3: 12 x Great White® LEDs
- Output:**
 - PM-358-1: 300 lumens
 - PM-358-2: 500 lumens
 - PM-358-3: 1000 lumens
- Dimensions:**
 - PM-358-1: 195 x 27mm
 - PM-358-2: 348 x 27mm
 - PM-358-3: 500 x 27mm
- Voltage:** Multi-voltage: 12/24Vdc
- IP rating:** IP68
- Operating temperature:** -30°C to +50°C
- Mounting:** Surface mounts with screws
- Wiring:** Hardwired with stripped leads
18-inch version available with wires at both ends for daisy-chaining lights together.
- Timer Switch:** Optional timer switch available (PM-5600 series)
- Vibration resistant:** Yes
- Power rating:**
 - PM-358-1:
 - PM-358-2: 3.6W @ 12 V /
 - PM-358-3: 4.44W @ 12V / 7.0W @ 24V
- Current draw:**
 - PM-358-1:
 - PM-358-2: 0.30A @ 12 V /
 - PM-358-3: 0.37A @ 12 V / 29V @ 24V
- Reverse polarity protection:** Yes
- Warranty:** 3 years

Dimensions

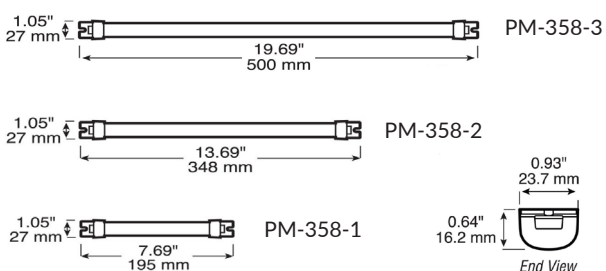

Part number

PM-358-1	195mm, stripped leads
PM-358-2	348mm, stripped leads
PM-358-3	500mm, stripped leads
PM-5600	Optional timer switch - surface mount
PM-5600-1	Optional timer switch - recessed mount

Materials

- Lens:** Polyethylene Terephthalate Glycol (PETG)
- End caps:** Polycarbonate

+44 (0) 1296 340045

sales@peterson europe.co.uk
sales@peterson europe.eu

peterson europe.com
peterson europe.eu

