

DATA SHEET

PM-850C / 850HC


LED reverse light module



Images



Dimensions

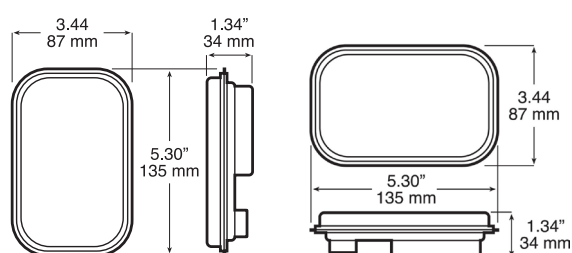

PM-850C

PM-850HC

Specifications

Functions:	LED reverse light module
LEDs:	20 x diodes
Lens colour:	Clear
Certifications:	PM-850C: ECE Reg 23 when mounted vertically PM-850HC: ECE Reg 23 when mounted horizontally
Voltage:	Dual voltage 12/24V
Operating range:	9-32Vdc
IP rating:	IP67
Operating temperature:	-30°C to +50°C
Mounting:	Surface mounts using B850 series bracket or flush mounts using B850-18 grommet May be mounted horizontally or vertically
Wiring:	300mm cable terminated in partially-stripped wires
Power rating:	7.28W @ 12V / 7.7W @ 24V
Average current draw:	0.61A @ 12V / 0.32A @ 24V
Reverse polarity protection:	Yes
Warranty:	3 years

Materials

Lens:	PMMA-HI
Base:	ABS

Part numbers

PM-850C	Reverse light module - vertical
PM-850HC	Reverse light module - horizontal