




DATA SHEET

PM-M1203 series

LED outline and side marker lights



Images

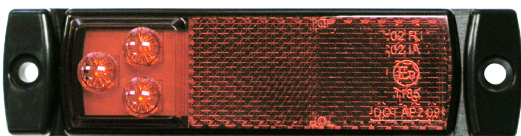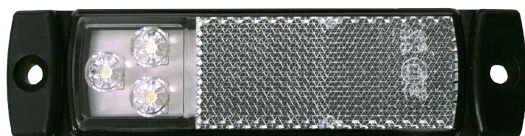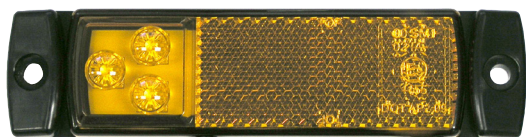


Specifications

- Functions:** LED front and rear outline, and side marker lights
For vertical or horizontal mounting
- LEDs:** 3 LEDs and integral reflex
- Certifications:** ECE Reg 7 A E9 02 6196 (red/white)
ECE Reg 3 IA E9 02 1013 (reflector)
ECE Reg 91 SM1 E9 00 1013 (amber)
- Dimensions:** 128mm L x 32mm W x 17mm H
- Voltage:** 12/24V
- Operating range:** 9-32Vdc
- IP rating:** IP67
- Operating temperature:** -30°C to +55°C
- Mounting:** Surface mounts on any flat surface
- Wiring:** 300mm long sheathed cable
- Power rating:**

PM-M1203A:	0.45W @ 12V	0.92W @ 24V
PM-M1203R:	0.6W @ 12V	1.3W @ 24V
PM-M1203C:	0.4W @ 12V	0.8W @ 24V
- Current draw:**

PM-M1203A:	0.04A @ 12V	0.04A @ 24V
PM-M1203R:	0.03A @ 12V	0.03A @ 24V
PM-M1203C:	0.02A @ 12V	0.02A @ 24V
- Reverse polarity protection:** Yes
- Warranty:** 3 years

Dimensions

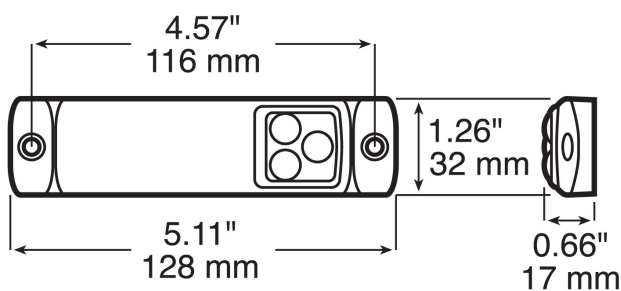

Materials

- Lens:** PMMA
- Housing:** ABS

Part number

PM-M1203A	Side marker, amber
PM-M1203C	Front outline marker, clear
PM-M1203R	Rear outline marker, red